25 SERIAL GEAR PUMP
T2

XXX XXX XX

- XXX → PUMP TYPE
- XXX → DISPLACEMENT
- XX → ROTATION

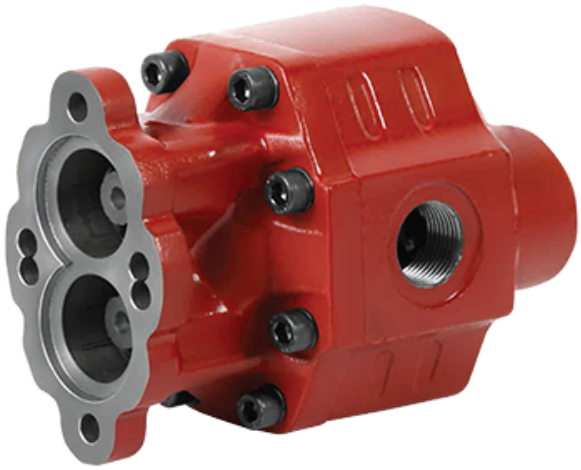

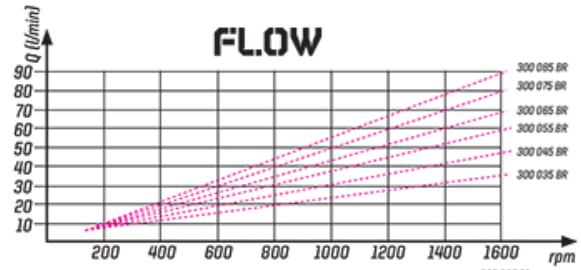

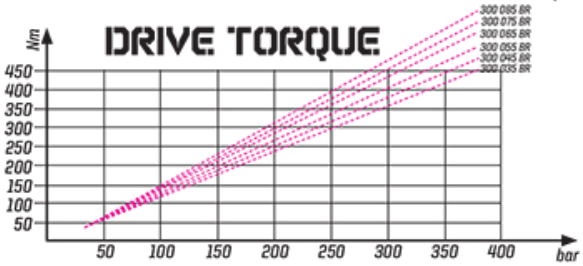

Fluid Temp. °C	Input Pres. Bar	Optimale K. Viscosity	Oil Filtering
0 / 100	0,3 / 1,7 bar	10 / 100 CST	> 200 bar : 25 um <200 bar : 35 um

BIDIRECTIONAL PUMP



NOTE : THE ABOVE SPECIFICATIONS REFER TO OIL TYPE ISO VG 46 AT 50°

NOTE : SEE TECHNICAL PAGE TO CHANGE THE DIRECTION OF ROTATION

USED PLACED :
DUMPER TRUCKS
PRIVATE AIM WINCHES
TRACTOR LADLES







Code	Displacement cm³/1000	Rotation	Test Pressure	Max. Test Pressure	A	B	Oil Inlet	Oil Outlet	Max. Con. Speed Rpm	Max. Inter. Speed Rpm	Weight
252 025 03	25,8	Double	220	240	161	109	G 1"	G 3/4 "	2450	2500	10,5
252 035 03	35,4	Double	215	235	167	112	G 1"	G 3/4 "	2450	2500	11
252 045 03	45,2	Double	200	220	173	115	G 1"	G 3/4 "	2400	2500	11,5

Test Pressure : 60 sec Max Test Pressure : 5 sec. Max.

www.hidrooozcelik.com